


## Resistance thermometers with connector and transmitter Series IWT408

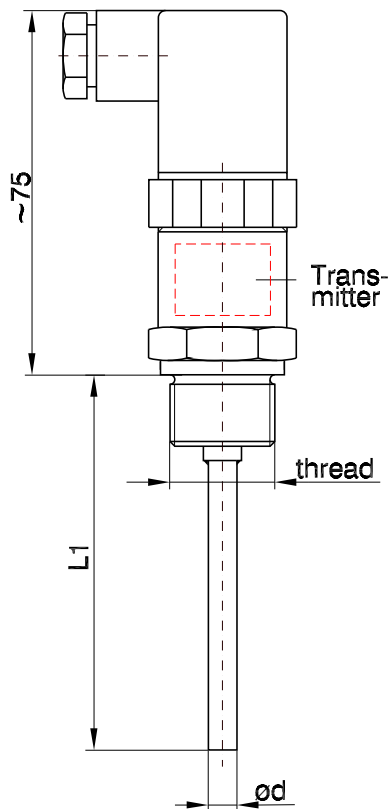

Small resistance thermometer for screwing in with connector and switch built-in transmitter

output 0 ... 10 V, measuring range after order

### Connection head

Connector GSP/GDM DIN EN 175301-803

### Protection classification

IP 65 according DIN 60529

### Application temperature

-50 up to +400 °C (max. 85 °C near the transmitter)  
on inquiry

### Measuring range of transmitter

on inquiry

### Temperaturesensor

1xPt 100 cl. F0,15 (old cl. A) acc. to DIN EN 60751  
1xPt 100 cl. F0,3 (old cl. B) acc. to DIN EN 60751  
on inquiry

### Circuitry

2 wire circuit

### Protective tube material

1.4571  
on inquiry

### Protective tube diameter d

6 mm  
on inquiry

### Insert length L<sub>1</sub>

on inquiry

### Thread

G1/2A  
on inquiry

### Output

0 ... 10V

Resistance thermometers  
with connector and transmitter  
Series IWT408

---

**Circuit**

